

ATHENA BX

ELECTROMAGNETIC DOSING PUMPS



Main characteristics

- PVDF PUMP HEAD suitable for chemical used in the Industrial, Waste Water Treatment and Potable Water applications
- CERAMIC BALL full chemical compatibility
- PTFE DIAPHRAGM unique life expectancy and compatibility with most chemicals
- STEADY DOSING Stabilized Multi Power Supply 100÷240 Vac 50/60 Hz with reduced consumption
- QUICK CONNECTIONS
- MANUAL PRIMING VALVE
- IP65 PROTECTION
- Adjustable flow rate by a knob on the front panel. e
- POWER-ON and LEVEL ALARMS LED
- 0÷20%, 0÷100% double manual flow regulation
- Anti-seepage system















Athena - Performance data

PERFORMANCES TEST HAS BEEN DONE AT AMBIENT TEMPERATURE, WITH WATER, AT 1,5 mt SUCTION HEIGHT

FLOW RATES	PRESSURES	CC/IMP.	CONNECTIONS	STROKES/MIN.	CONSUMPTION	WEIGHT	MODEL				
2,5 l/h	20 bar	0,35	4x6 – 4x7	120	14 watt	3kg	Athena 1				
3 l/h	18 bar	0,42	4x6 – 4x7	120	14 watt	3 kg					
4,2 l/h	14 bar	0,58	4x6 – 4x7	120	14 watt	3 kg					
7 l/h	8 bar	0,97	4x6 – 4x7	120	14 watt	3 kg					
						1					
3 l/h	12 bar	0,31	4x6	160	20 watt	3 kg	Athena 2				
4 l/h	10 bar	0,42	4x6	160	20 watt	3 kg					
5 l/h	8 bar	0,52	4x6	160	20 watt	3 kg					
8 l/h	2 bar	0,83	4x6	160	20 watt	3 kg					
7 l/h	16 bar	0,39	4x6	300	40 watt	4 kg					
10 l/h	10 bar	0,56	4x6	300	40 watt	4 kg	Athena 3				
15 l/h	5 bar	0,83	4x6	300	40 watt	4 kg					
18 l/h	1 bar	1,00	4x6	300	40 watt	4 kg					
20 l/h	5 bar	1,11	8x12	300	40 watt	4 kg	Athena 4				
32 l/h	4 bar	1,78	8x12	300	40 watt	4 kg					
62 l/h	2 bar	3,44	8x12	300	40 watt	4 kg					
110 l/h	0,1 bar	6,11	8x12	300	40 watt	4 kg					

















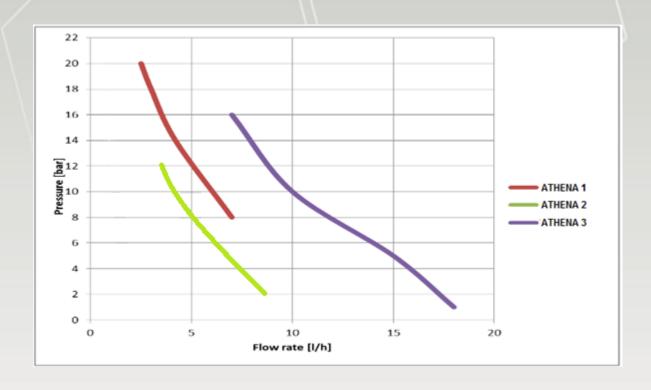

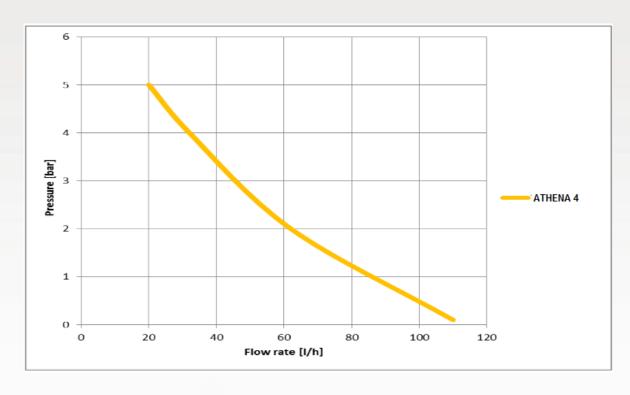
















Anti-seepage system

The anti-seepage system, is a solution to prevent the intrusion of chemical product inside the pump: leakage and chemical intrusion can happen when the O-ring is damaged or consumed by regular use.

This device is integrated in the hydraulic part, between pump head and body, behind the diaphragm: the outgoing collection channel of the anti-seepage device (see below blue arrow) collects the leakage and expel it out. When the leakage is visible, the operator can proceed either tightening the 4 bolts of the head (4Nm torque) or disassembling the head and inspect it in order to understand leakage causes.

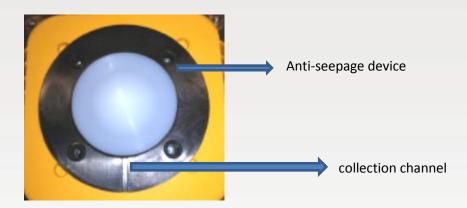















Main application

- Electroplating industry, Pickling, Degreasing and metal treatments generally
- **Cooling Tower**
- Potable water application
- Reverse osmosis application
- Paper industry
- Ceramic industry

Example of installation


















Installation kit



Accessories










AC.VIE				
	• Extractable injection valve PVC ½" g.m. IN - ½" g.m. OUT			
	• Extractable injection valve with ball valve PVC ½* g.m. IN - ½* g.m. OUT			




















Dimensional drawings

Plumbing

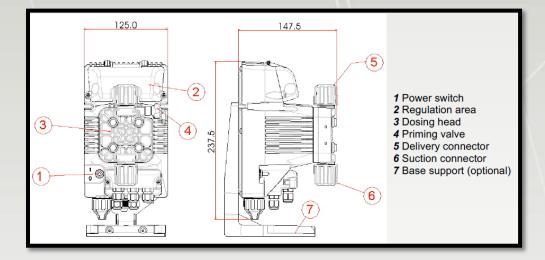

Fixing templates

